

Software (or Reseller) Name: **Future POS (Future POS)**


Hardware Type	Compatible Model (min. requirements)	Driver	PioneerPOS Suggested PN
All-in-one	15" LCD display, AtomDC 2.13GHz, 2GB memory, built-in printer (USB), card reader track 1, 2.	Not required	M-Line: GM25YR000911 S-Sline: GM25YR000918
Printer	S-Line Printer (Serial) ST-EP4 Printer (Serial)	Not required	46B-TPA-EP01S C31CB10722
Card Reader	USB KBD wedge	Not required	46B-U32000 46B-D21000
Customer Display/ Pole Display/ Line Display	PD3000	Not required	46B-RCRJ-PD3
Cash drawer	Any Serial Interface Drawer	Not required	N/A

Before you get started:


1. Make sure the generic printer is deleted from the printer folder
2. Default password is 1
3. Change the computer name to: Focus

Printer Setup (S-Line or ST-EP4 Serial)

1. Login to “tool” using password

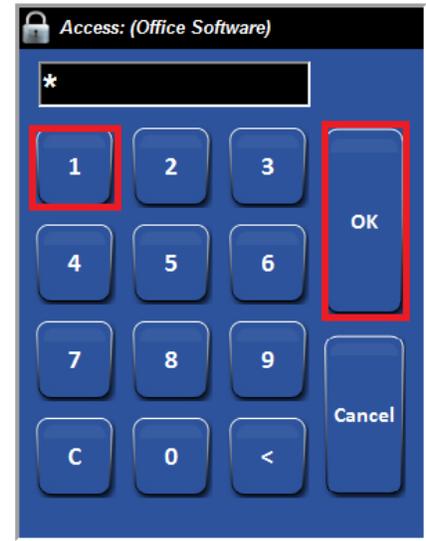

2. Click on **Printers** and select **Remotes**

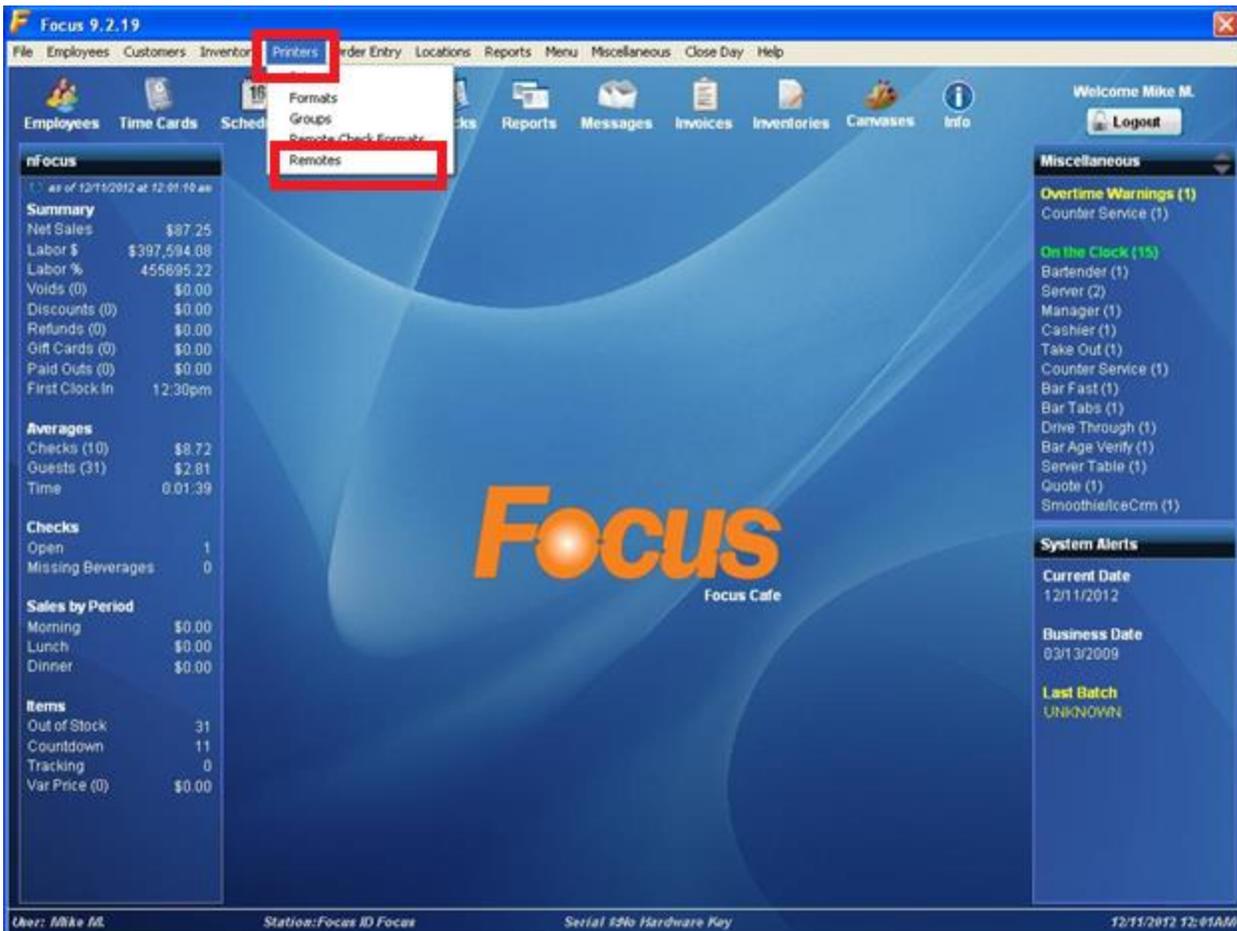

3. Set Remote Printers setting


Station: Focus

Driver: Epson T88

Port: COM1


Baud: (ST-EP4 38400 – S-Line 9600)

Note: Make sure the printer (S-Line or ST-EP4) is connected to COM1 port.

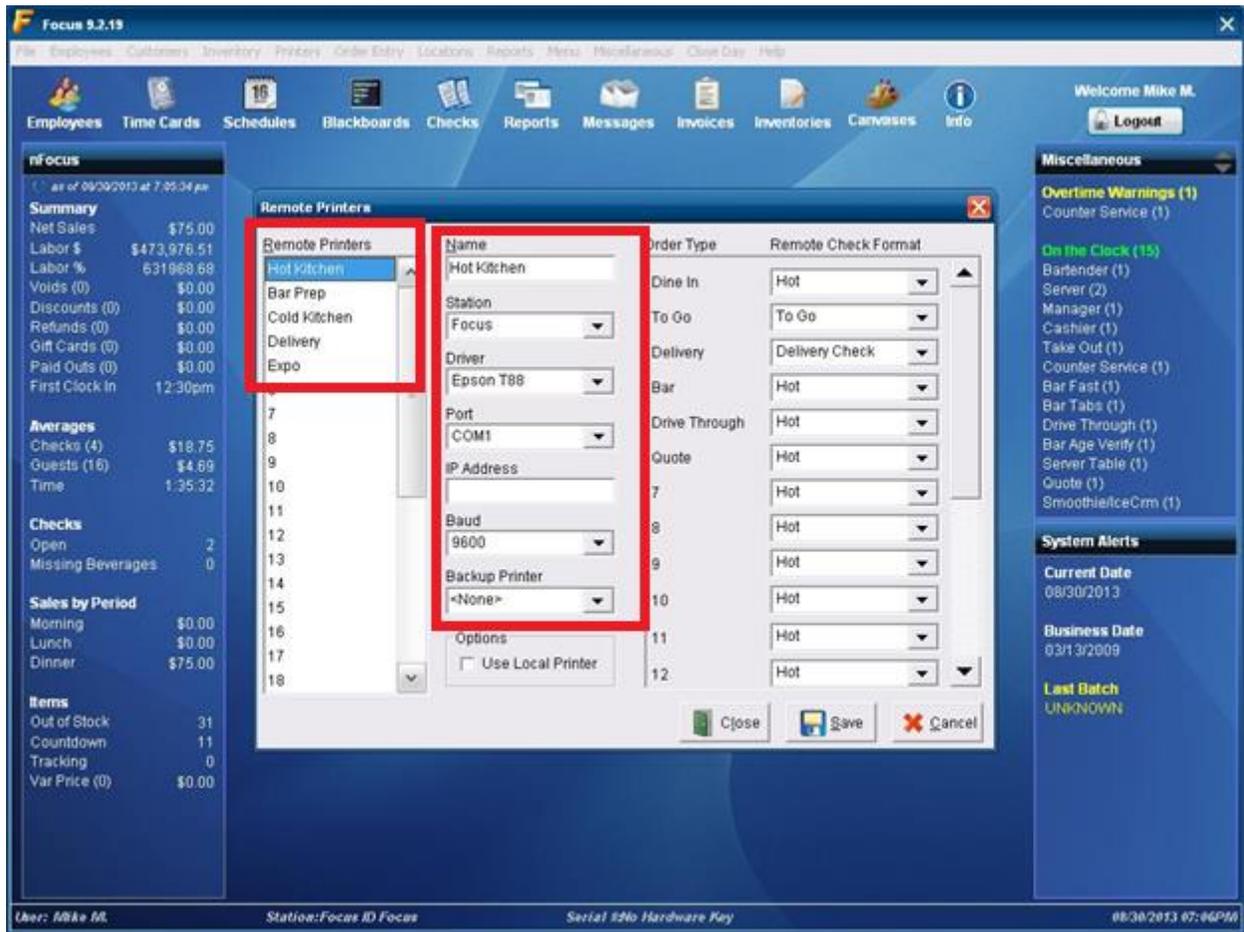


4. Repeat these steps for Bar Prep, Cold Kitchen, Delivery, and Expo

5. Go to “Location” → Stations

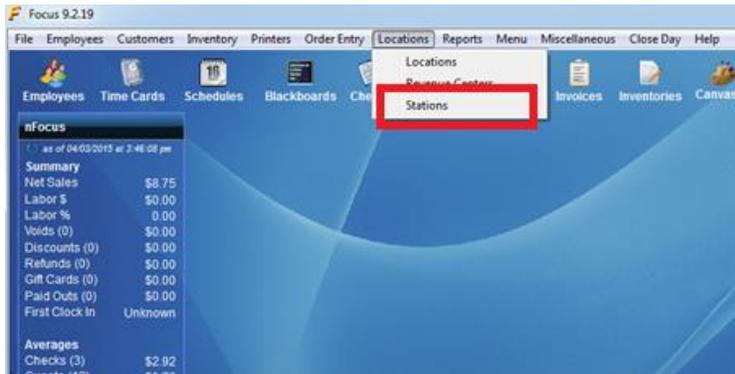

6. On the Stations tab, change Computer Names to Focus
7. Make sure the printer is connected to COM1. Then, set printer settings to:
Port: COM1
Driver: Epson T88
Station: Focus
8. Repeat the same for **Backup, Cashier, Bar, and Delivery Station**

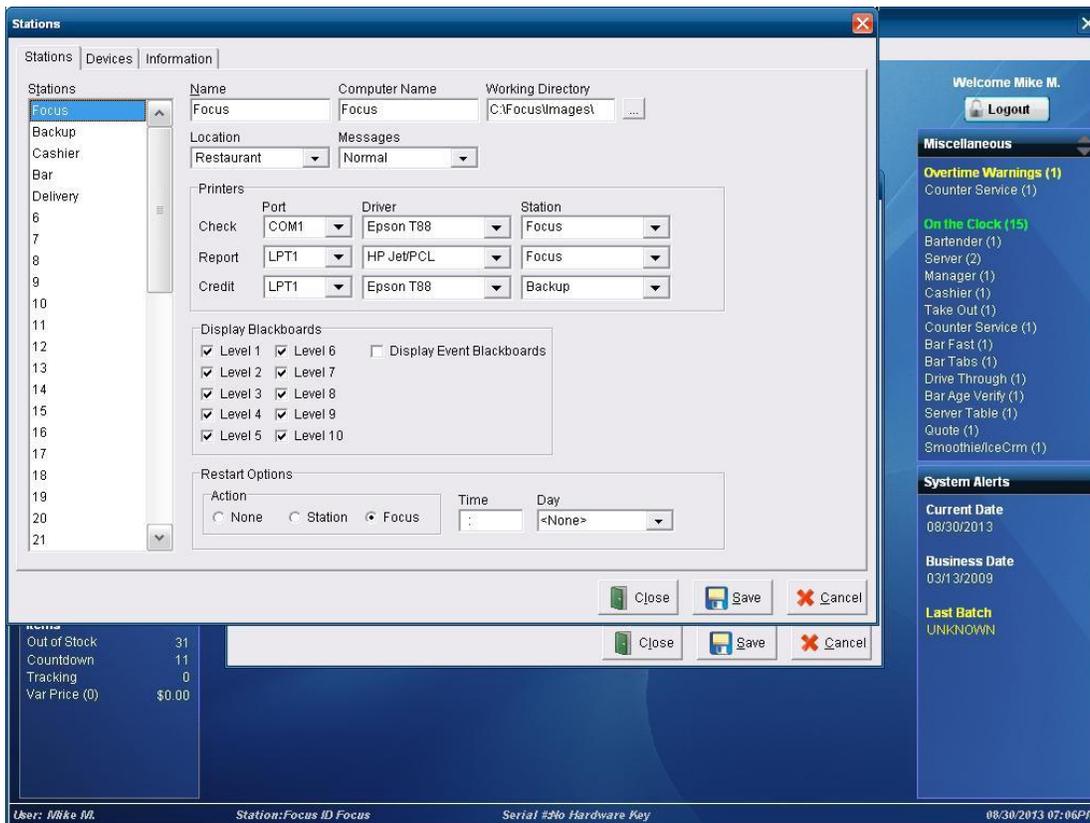

Cash Drawer and Customer Display Setup

1. Go to **Locations -> Stations**
2. Go to the **Devices** tab

Cashdrawer	Rear / Customer Display
Set Device 1 to Drawer	Set Device 2 to Pole Display
Port: COM2	Port: COM3
Baud: 9600	Baud: 9600
Parity: None	Parity: None
Data Bits: 8	Data Bits: 8
Stop Bits: 1	Stop Bits: 1
Access: 1B70019FA	

