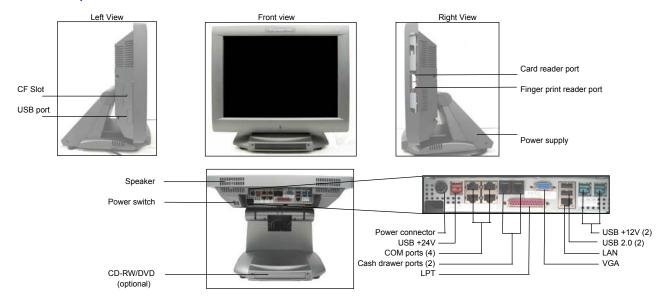# Stealth-M5 : Quick Setup Guide

For more assistance, please contact <support@pioneerpos.com>, or 909-468-9757.
Website: http://www.pioneerpos.com

I. Product Descriptions

Left View

Front view

Right View

CF Slot

USB port

Card reader port

Finger print reader port

Power supply

Speaker

Power switch

CD-RW/DVD
(optional)

Power connector
USB +24V
COM ports (4)
Cash drawer ports (2)
LPT

USB +12V (2)
USB 2.0 (2)
LAN
VGA

II. Setting Up the Terminal

1. Tilt the terminal, then remove screw (arrow).

2. Pull cover to access ports. (see arrows)

3. Remove screws to open Base cover (see arrows.)

4. Pull cover to open (see arrow.)

5. Route cables of peripherals to the front.

6. Connect cables to respective ports.

7. Place back the port's cover and Base cover (see arrows.)

8. Press power switch to turn on.

III. Installing Mag. Card and/or Finger Print Reader (optional)

Card Reader

Finger Print

1. Remove screws (circles) to access ports for the reader(s)

2. Connect cable(s) from the reader to the respective port(s) (see arrows)

3. Attach the reader to the main unit. (see arrow)

4. Secure the reader with screws (circ)