


Software (or Reseller) Name: **Aldelo for Restaurants (Aldelo)**


Hardware Type	Compatible Model (min. requirements)	Driver	PioneerPOS Suggested PN
All-in-one	15" LCD display, AtomDC 2.13GHz, 2GB memory, built-in printer (USB), card reader track 1, 2.	Not required	M-Line: GM25YR000911  S-Sline: GM25YR000918
Printer	S-Line Printer (Serial) ST-EP4 Printer (Serial)	Windows Driver	46B-TPA-EP01S C31CB10722
Card Reader	USB KBD wedge	Not required	46B-U32000 46B-D21000
Customer Display/ Pole Display/ Line Display	EPSON	Not required	46B-RCRJ-EPS
Cash drawer	Any Serial Interface Drawer	Not required	N/A

## Printer (S-Line or ST-EP4 Serial) & Cash Drawer Setup


1. Login to Aldelo Back Office, default pin "1"

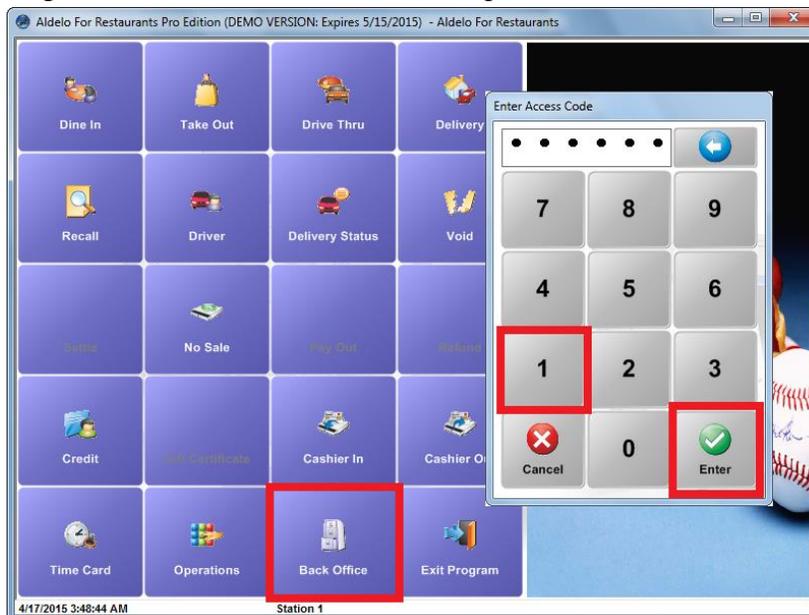


## 2. Click on Station Settings

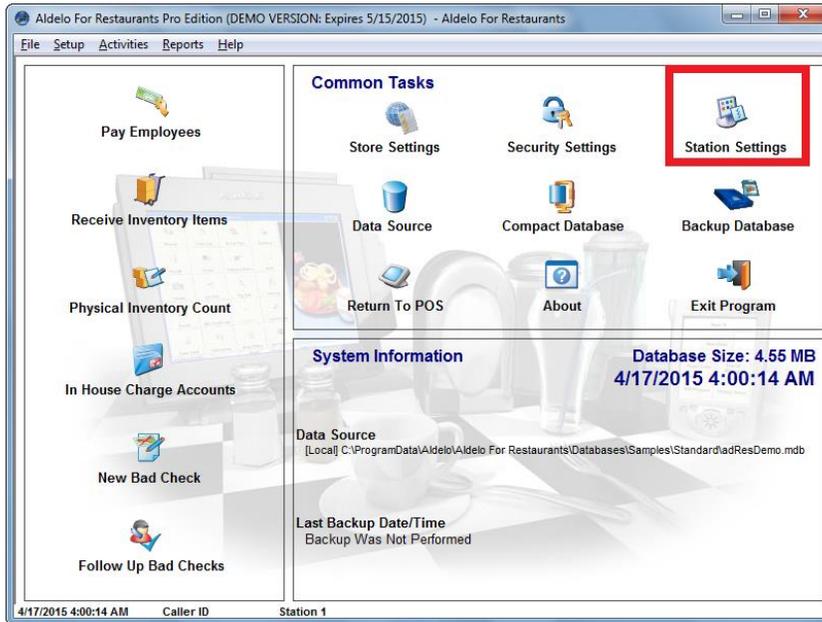

## 3. Click on the Printer tab

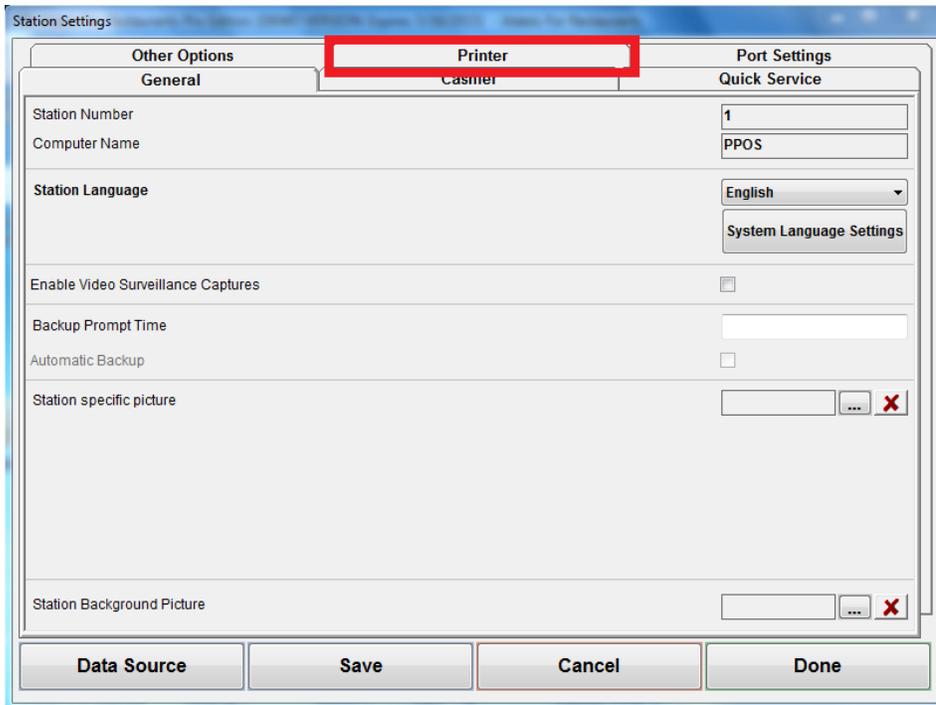

4. Under Receipt Printer, select EPSON BA-T500IIPP Receipt  
Under Receipt Printer Type, select Epson TM-88II/III Large Font Autocut  
Click Save

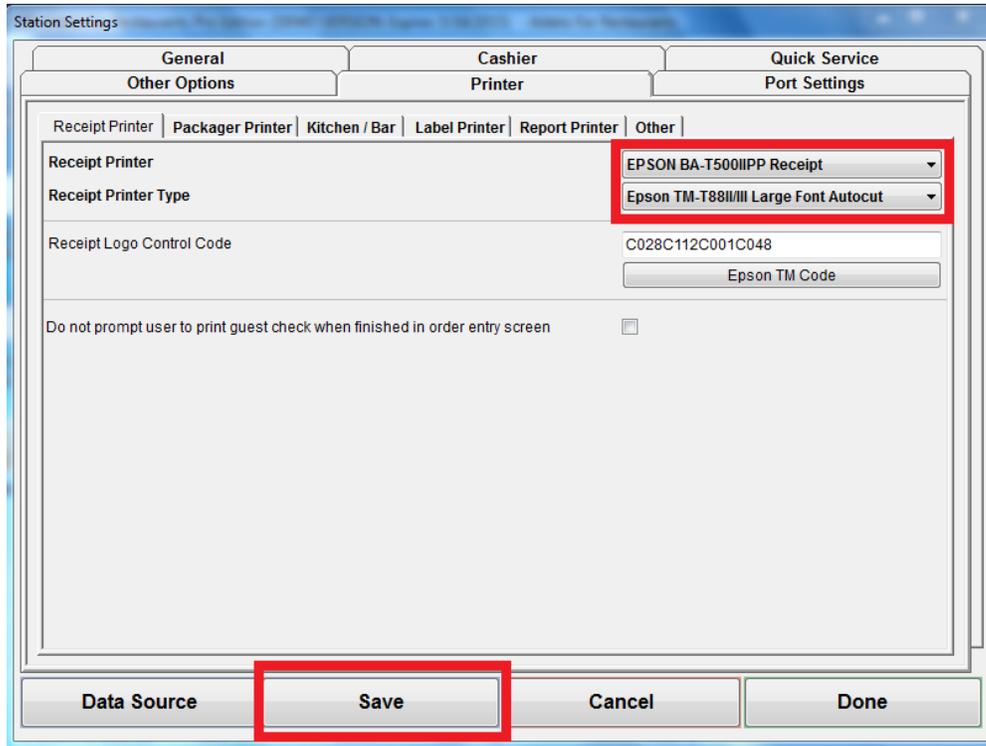


## Customer Display (EPSON Emulation only) & Cash Drawer Setup

1. Go to Station Settings -> Port Settings
  - a. **Pole Display**

Select the correct Pole Display COM Port (COM 4 in this example)  
Enter C012 as the Home Control Code
  - b. **Cash Drawer**

Select the correct Cash Drawer COM Port (COM 1 in this example)  
Enter “BEL” for the Open Code.
2. Click Save

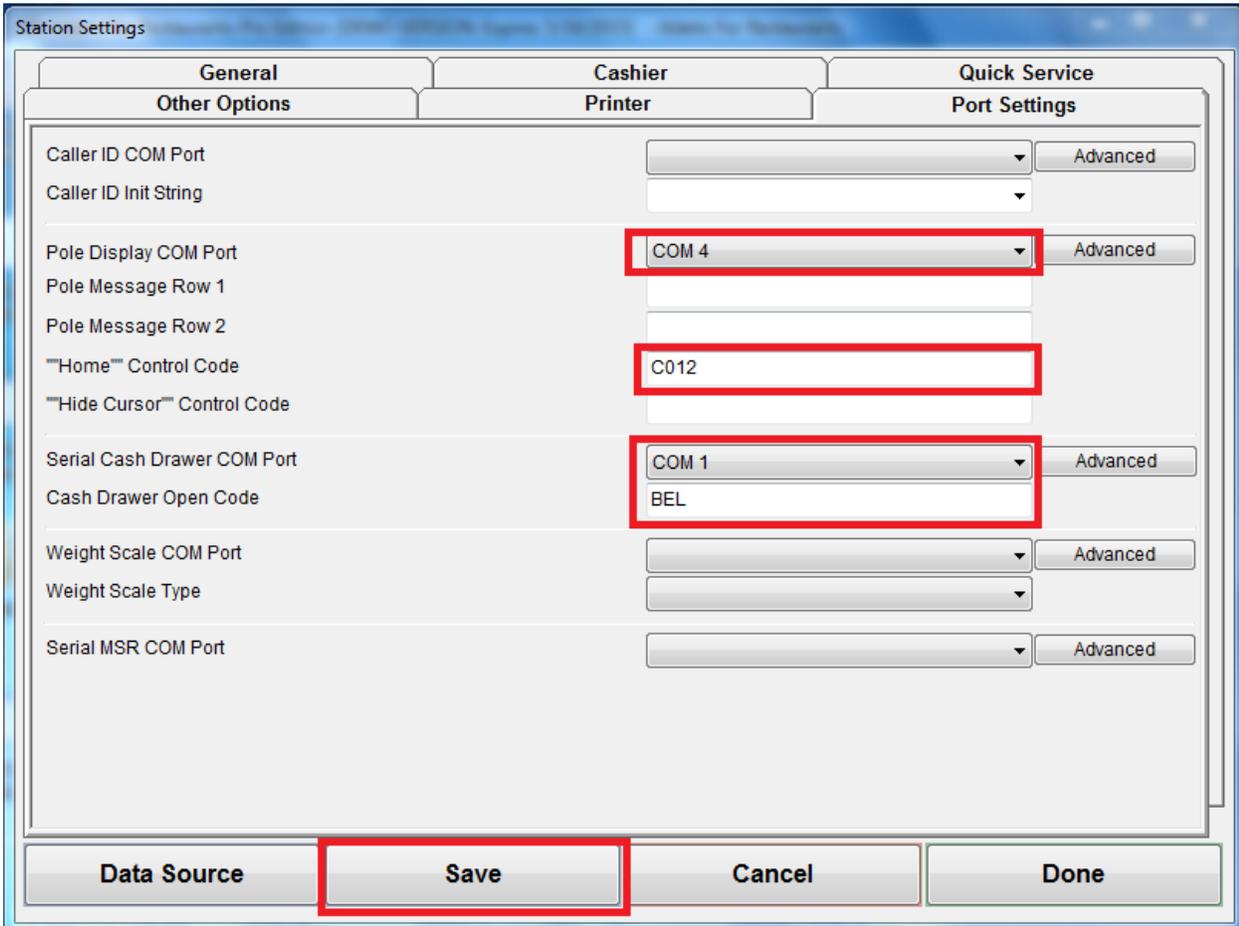

The screenshot shows the 'Station Settings' dialog box with the 'Port Settings' tab selected. The settings are as follows:

Field	Value	Advanced
Caller ID COM Port	[Dropdown]	Advanced
Caller ID Init String	[Dropdown]	
Pole Display COM Port	COM 4	Advanced
Pole Message Row 1	[Text]	
Pole Message Row 2	[Text]	
"Home" Control Code	C012	
"Hide Cursor" Control Code	[Text]	
Serial Cash Drawer COM Port	COM 1	Advanced
Cash Drawer Open Code	BEL	
Weight Scale COM Port	[Dropdown]	Advanced
Weight Scale Type	[Dropdown]	
Serial MSR COM Port	[Dropdown]	Advanced

At the bottom of the dialog, the 'Save' button is highlighted with a red box, along with 'Data Source', 'Cancel', and 'Done' buttons.